

Technical Data

SPS20000

Serial number:

Basic data		SPS20000B	SPS20000C
Rated lifting moment		20 mt	20 mt
Rated lifting capacity		8000 kg (2.5 m)	8000 kg (2.5 m)
Max. outreach		14.0 m	17.7 m
Max. lines of the hook		4	4
Slewing angle (continuous)			
Boom raising angle		0~75°	0~75°
()	Max. lifting height(the measurement from the ground after the outriggers fully extended)	16.1 m	20.1 m
Length of the basic boom		5.3 m	5.3 m
Length of fully extended boom		14.3 m	18.1m
Boom sections		4	5
Outrigger span(fully extended)		5.6 (m)	5.6 (m)
Recommended volume for the system		70 L/min	70 L/min
Operating pressure		25/28 Mpa	25/28 Mpa
Oil tank capacity		200 L	200 L


Subject to change, production tolerances have to be taken into account.

Crane weight		
SPS20000B	Floor Control SPS20000B	3820 kg
SPS20000C	Floor Control SPS20000C	4110 kg

Subject to change, production tolerances have to be taken into account.

Dimensions


Crane

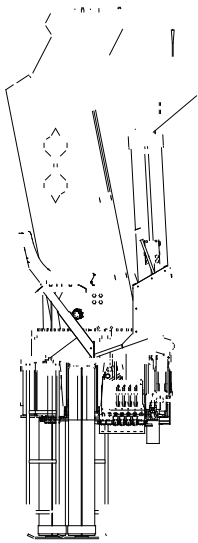


Subject to change, production tolerances have to be taken into account.

Dimensions

Crane

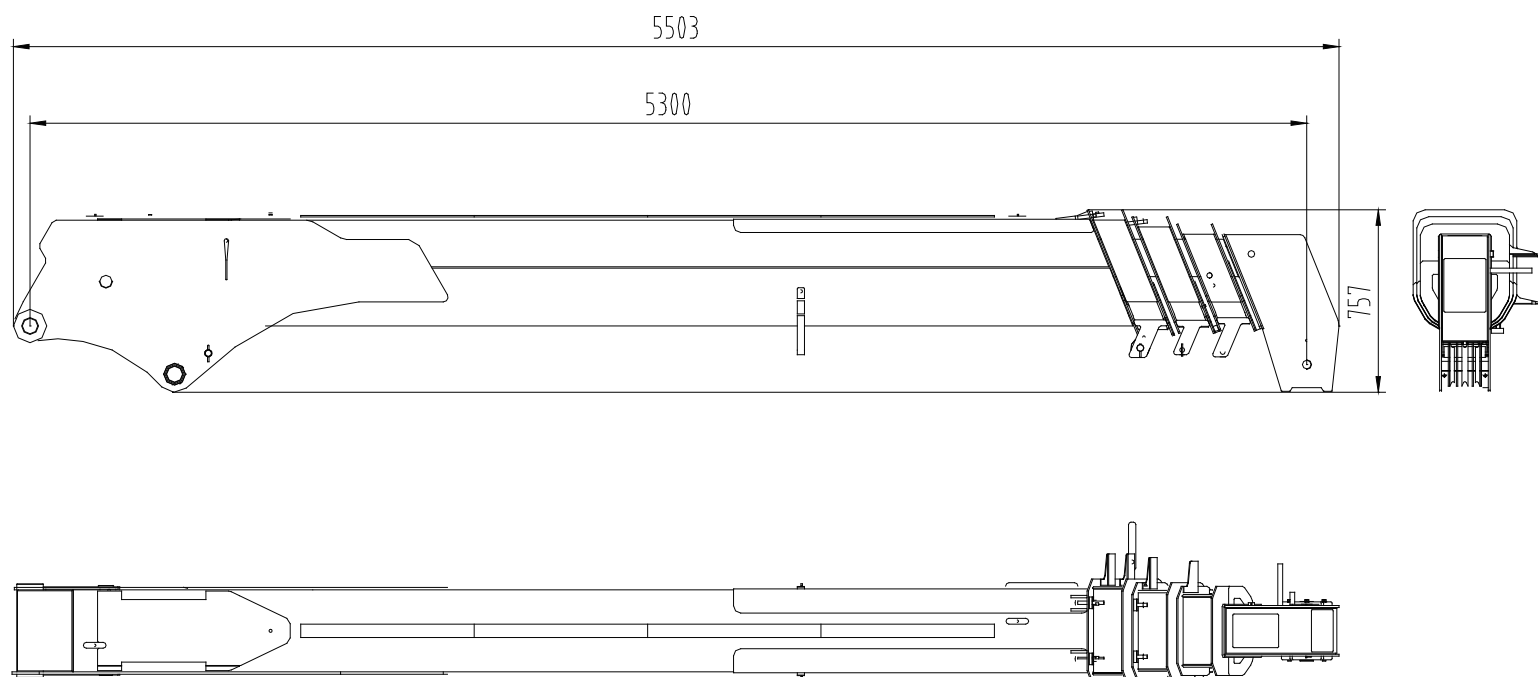

Subject to change, production tolerances have to be taken into account.

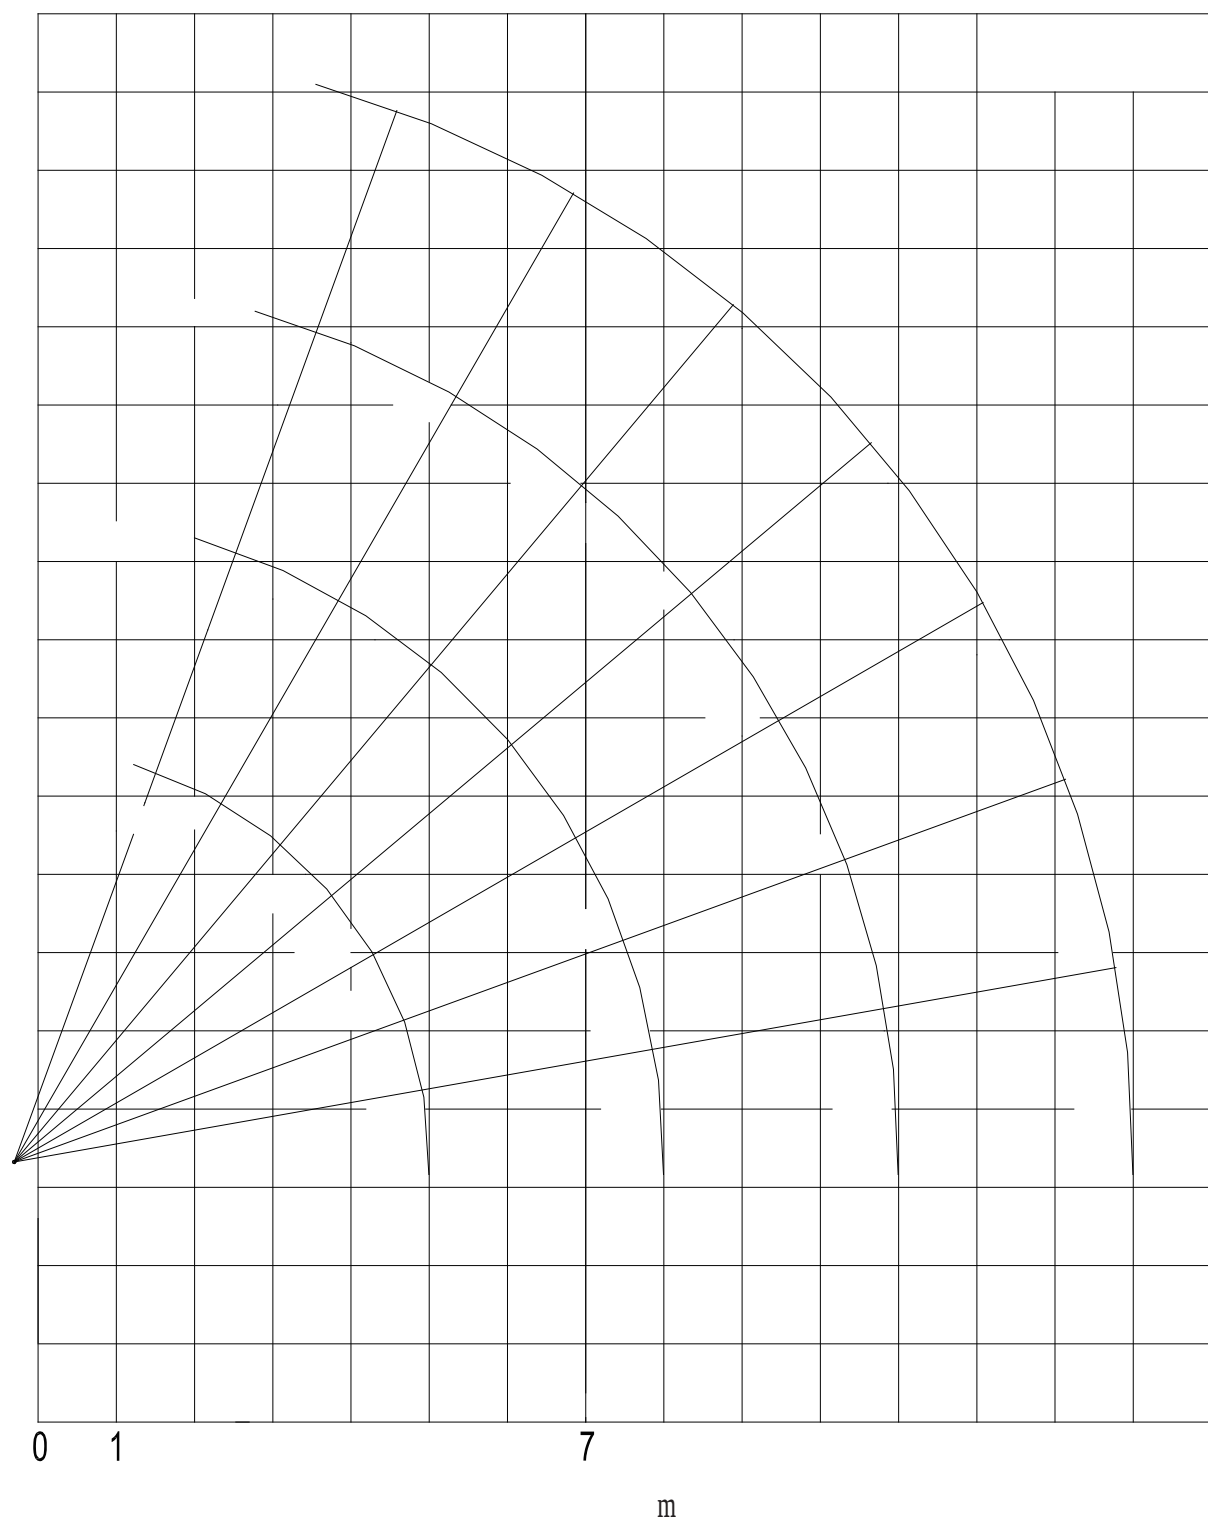

85%

Subject to change, production tolerances have to be taken into account.

Intallation dimension

