Technical Data

SPS45000

Serial number:

DB-053

Version:05/2017

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com

Subject to change,production tolerances have to be taken into account.

	+
	(/)%
	(/%
9	
	)(%
	-%
C	(0
9	
	.%
	(C
:	0%E
	0%
	)%E
	%

+

NOTE

The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

NOTE

- The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change,production tolerances have to be taken into account.

SPS45000C-M/H

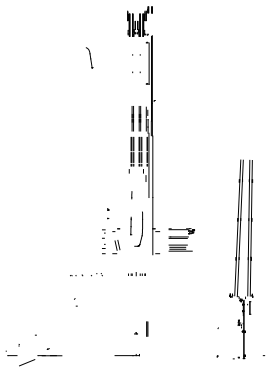

Subject to change,production tolerances have to be taken into account.

SPS45000CF/L

NOTE
The low-seat is optional equipment.

Lifting Height (m)

Working Outreach (m)

/

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

SANY PALFINGER

WWW.SANYPALFINGER.COM